

The NEW 6800Q Quiet Glide from ABH®

*A quiet environment
creates a healing environment*



- Zero Decibels gained during Push and Pull action
- Less than 5 lbs. to activate latch – Meets ADA Requirements
- Field Reversible Handing
- All BHMA Finishes Available
- Custom Engraving Available
- Patented Linear Acting Cam for smooth operation
- One Continuous Heavy Duty Spring
- UL Listed in U.S.A. and Canada
- Patent# 7,285,374 – Patent(s) pending

Independent Testing of Hospital Latch Units when
latch is Pushed or Pulled to retract the latch

ABH®	6800Q	0 Decibels Gained
GJ*	HL6	34.7 Decibels Gained
Trimco*	1562	32.8 Decibels Gained
Sargent*	114/115	31.2 Decibels Gained

ABH®

Innovation, Quality, Customer Service

Tel (630) 875-9900 • www.abhmfg.com • abhinfo@abhmfg.com

* Brand names are trademarks or registered trademarks of their respective companies.

* The information contained on this sheet is for informational purposes only and may not apply to your situation. Neither the publisher nor author shall be liable for any loss of profit or any commercial damages resulting from use of this Cutsheet. Information provided is subjective and has been compiled through an independent test.

Hospital Push/Pull Latches



6800 Series - Low Profile Cylindrical Latches

Innovation, Quality, Customer Service...


Standard Features

- Cylindrical latch application - passage function
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim mounts with four thru-bolts for maximum stability
- Handing of unit is field-reversible by easily reversing the cam holder assembly on the backside of the unit
- Linear acting cam which provides for a smoother operating unit
- One continuous spring provides a smoother operation and an extended life for the unit
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- Patent #7,258,374


Optional "Q" Quiet Latch available - Zero decibels gained when operating the handles. Patent(s) pending.



Optional Round Cover & Custom Engraving Shown

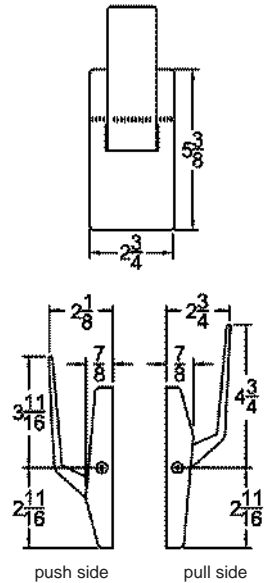

Models

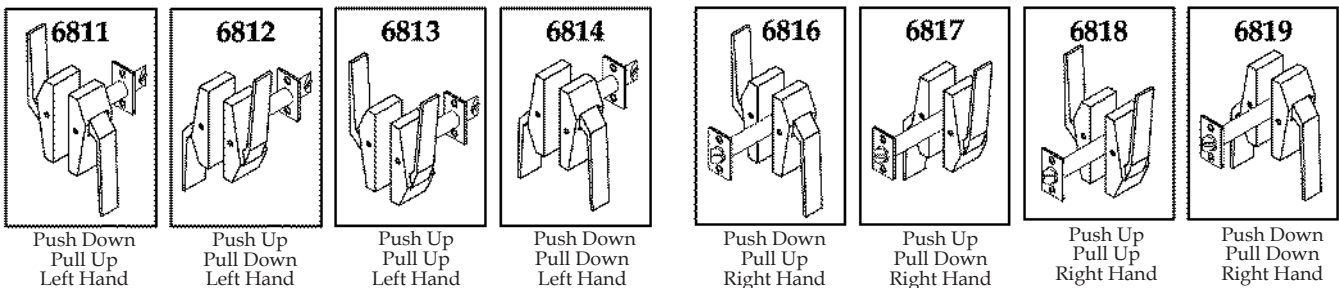

How to Order:

Example: 6811 - 2 A - US32D - AM

Model: _____

- 6811 • 6812 • 6813 • 6814
- 6816 • 6817 • 6818 • 6819

Latch Backset: _____

- 2 = 2-3/4" • 5 = 5" • 3 = 3-3/4" • 7 = 7"

Strike: _____

- T = 2-3/4" T-Strike • A = 4-7/8" ASA Strike

Finish: _____

- US32D • US32 • US10B • US3
- US26D • US26 • US10 • US4

Options, if Needed: (See page C-3 to C-5 for details) _____

- H • AM • L • PL • PS • EX • X
- RC • SEC • THICK • P • Q

Architectural Builders Hardware Manufacturing, Inc.
1222 Ardmore Avenue, Itasca, IL 60143
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224
Web: www.abhmf.com • Email: abhinfo@abhmf.com

